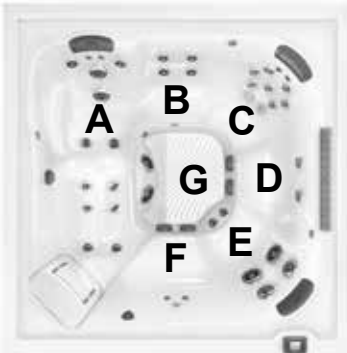


# Jacuzzi J-LXL

## Specifications


<b>Seating Capacity</b> .....	5-6	
<b>Dimensions</b> .....	91" x 91" x 34" (231 cm x 231 cm x 86 cm); <b>For complete dimensions, see page 86</b>	
<b>Dry Weight</b> .....	914 lbs (415 kg) - <i>Approximate</i>	
<b>Filled Weight (Spa Volume)</b> .....	4,625 lbs (2,098 kg) - <i>Approximate</i>	
<b>Filled Weight (Average Fill)</b> .....	3,666 lbs (1,663 kg) - <i>Approximate</i>	
<b>Water Capacity (Spa Volume)</b> .....	445 US gallons (1,685 Liters)- <i>Approximate</i>	
<b>Water Capacity (Average Fill)</b> .....	330 US gallons (1,249 Liters)- <i>Approximate</i>	
<b>Electronic Controls</b> .....	Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles	
<b>Pump 1</b> .....	North America (60 Hz): 1-Speed, 5.1 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): .....2-Speed, 2.0 HP continuous</b>	
<b>Pump 2</b> .....	North America (60 Hz): 1-Speed, 5.1 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): .....1-Speed, 2.0 HP continuous</b>	
<b>Circulation Pump</b> .....	Yes, 8-hour	
<b>Total PowerPro® Jets</b> .....	39 (Plus 2 IR Light Therapy)	
<b>Seat A Jets</b> .....	2 PowerPro® NX2, 2 PowerPro® RX, 2 PowerPro® FX Large Rotational, 2 PowerPro® FX Rotational, 6 PowerPro® FX	
<b>Seat B Jets</b> .....	4 PowerPro® RX	
<b>Seat C Jets</b> .....	2 PowerPro® NX2, 7 PowerPro® FX, 2 IR Light Therapy	
<b>Seat D Jets</b> .....	2 PowerPro® FX Rotational	
<b>Seat E Jets</b> .....	2 PowerPro® FX Large Rotational, 2 PowerPro® MX	
<b>Seat F Jets</b> .....	2 PowerPro® NX2	
<b>Footwell (G)</b> .....	2 PowerPro® FX, 2 PowerPro® MX	
<b>Massage Selector</b> .....	1	
<b>Air Controls</b> .....	3, On/Off rocker switch air controller	
<b>Water Management System</b> .....	One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft <sup>2</sup> filter; Floating Weir; Factory installed CLEARRAY Active Oxygen™ Clean Water System <b>Export (50 Hz): .....Factory installed CLEARRAY Active Oxygen™ Clean Water System</b>	
<b>LED Lighting</b> .....	Two underwater light with 4 color modes, waterfall lights, exterior corner lights	
<b>Cabinet</b> .....	Modern Hardwood, Brushed Gray, Smoked Ebony	
<b>Acrylic Colors</b> .....	Platinum, Porcelain	
<b>Headrests</b> .....	3	
<b>Waterfalls</b> .....	One; Independent flow rate (on or off) adjustment powered by pump 1	
<b>Electrical Requirements:</b> .....	North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 230-240 VAC@1x32A, 1x20A/1x16A, or 1x16A/1x16A/1x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>	
<b>Warranty*</b> .....	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights</b>	
<b>Audio System (Optional)</b> .....	N/A	

\*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-LXL

## Operation/Seat Depths

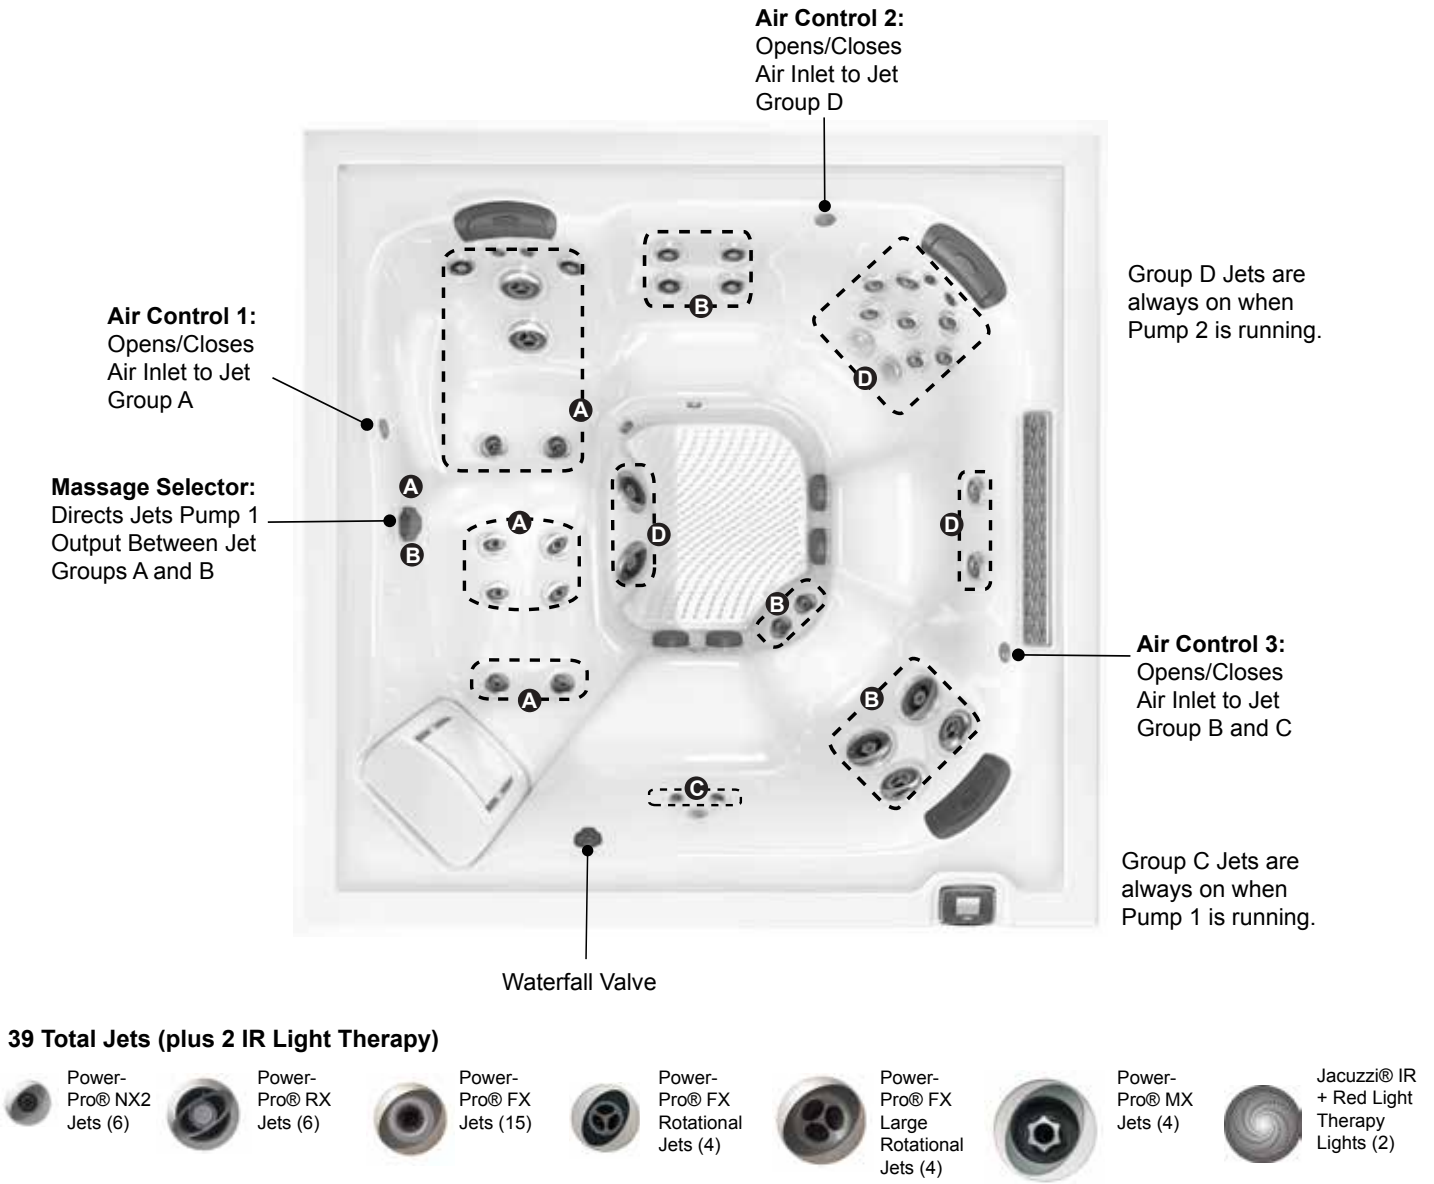


Spa Operation Subject to Change without Notice

## Seat Depths

**A = 25.00" (63.50 cm)**  
**B = 22.00" (55.88 cm)**  
**C = 27.00" (68.58 cm)**  
**D = 20.88" (53.02 cm)**  
**E = 26.25" (66.68 cm)**

**F = 18.38" (46.67 cm)**  
**G = 24.25" (61.60 cm)**  
**H = 31.00" (78.74 cm)**

Listed dimensions represent distance from top of the deck to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).

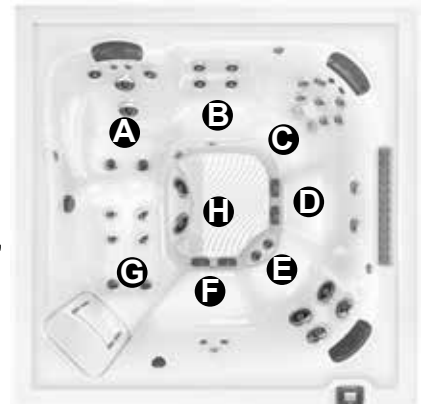


Dimensions/Specifications are Subject to Change Without Notice


# Jacuzzi J-LXL

## Dimensions


TOP VIEW

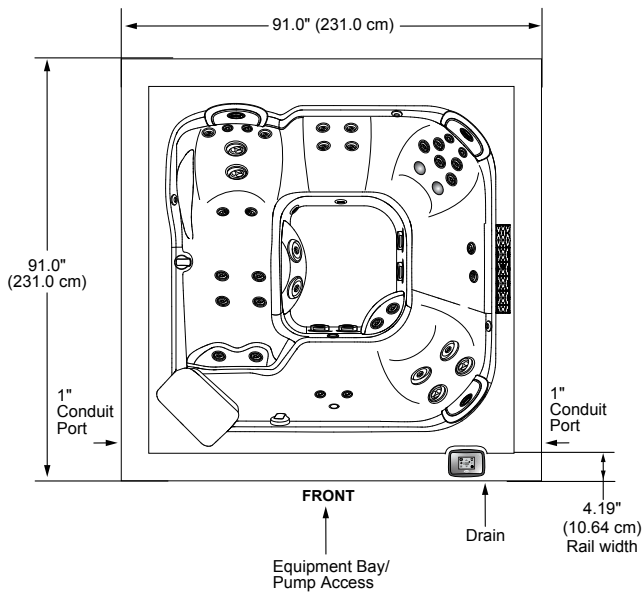


FRONT/BACK SIDE VIEW

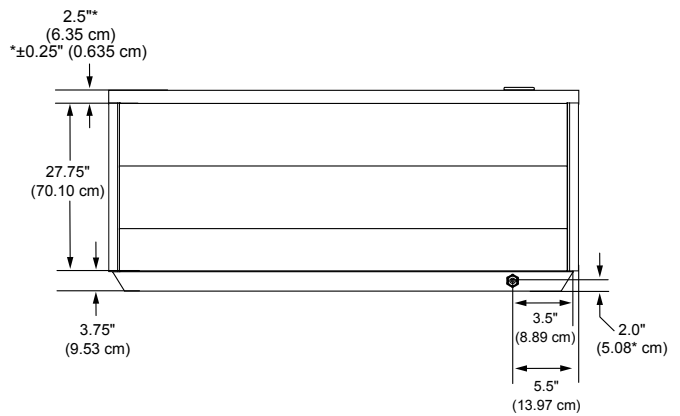

RIGHT SIDE VIEW

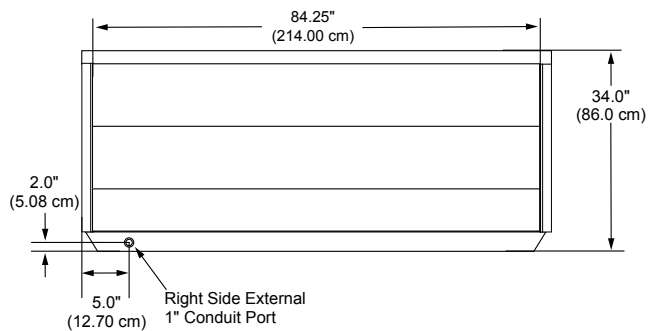

**IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.**

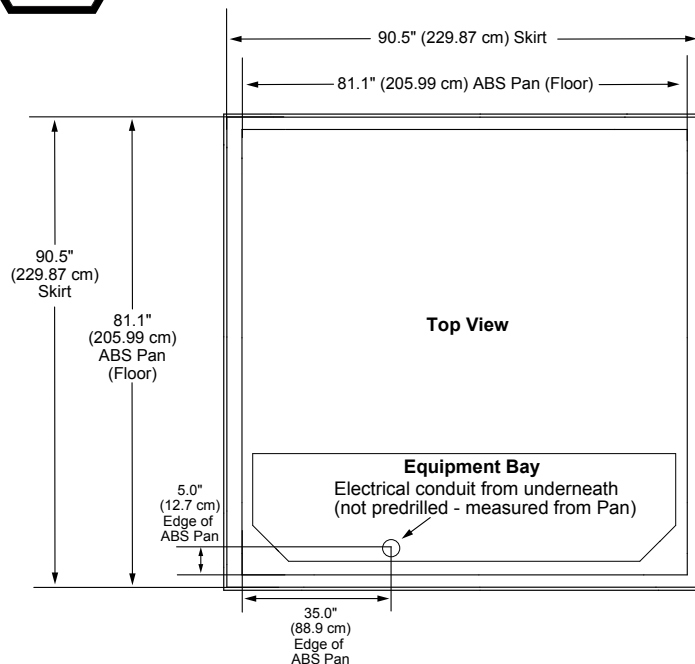

Dimensions/specifications subject to change without notice. Tolerance: ± 0.5" (1.27 cm)

Dimensions/specifications subject to change without notice. Tolerance ±0.5" (1.27 cm)